

CATALOG NO. 65

COLUMBIAN




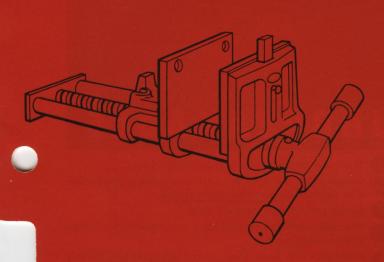

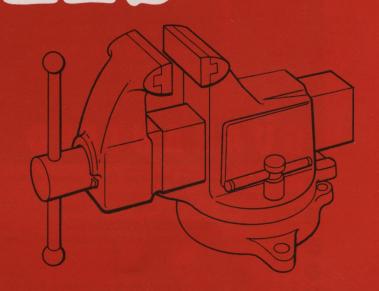


for best advice about VISES and LEVELS ... see your COLUMBIAN distributor


STRONGER • MORE POWERFUL • GUARANTEED UNBREAKABLE



COLUMBIAN MACHINISTS' VISES

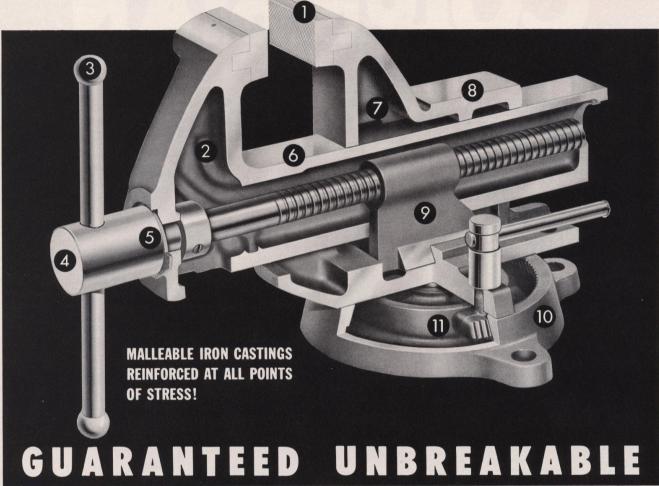

- 1 "T" section hardened tool steel faces pinned to jaw. Easily replaceable.
- Malleable iron front jaw with heavy internal ribs for added strength. <u>Guaranteed unbreakable!</u>
- 3 Steel handle balls forged from handle stock. Can't come loose.
- 4 Powerful cold-rolled steel screw.
- Self-lubricating graphite bronze thrust bearing. Reduces friction. Prevents wear. Eliminates end play.




REPLACEABLE JAW FACES

Among Columbian features are replaceable hardened tool steel "T" jaw faces. Drive pins anchor faces securely, so they cannot come loose, but are replaceable. Solid gripping surface covers entire jaw face area. Smooth jaw faces available without screw heads or screw holes in gripping face.

- 6 Front jaw beam covers and protects screw.
- Longer back jaw body for perfect alignment. Malleable iron castings guaranteed unbreakable.
- 8 Large ground and polished anvil.
- Precision-machined nut and back jaw keyway guarantee positive alignment.
- Malleable iron base. <u>Guaranteed unbreakable.</u> Swivels full 360°.
- 11 Forged steel, tapered-gear lock bolt prevents slippage.

KIT CONVERTS STATIONARY TO SWIVEL BASE VISE

Columbian stationary base Machinists' Vises are easily converted to Swivel Base Vises by addition of the Columbian Swivel Kit. Swivel can be installed in 2 minutes. Kit includes swivel base, lock nut, lock bolt, center bolt, washer, bushing and plug cap. Danger of slipping is completely eliminated by forged steel, tapered-gear lock bolt.



COLUMBIAN SWIVEL BASE MACHINISTS' VISES



America's most popular machinists' vise. Swivels full 360°. Geared bolt and base plate afford positive lock against slippage. Malleable iron castings, guaranteed unbreakable. Steel handle balls forged from handle stock. Self-lubricating graphite bronze bearing. Replaceable hardened tool steel "T" jaw faces, securely fastened with drive pins. No holes in gripping face. All sizes, except 6" and 8", have ground and polished anvil.

Vise No.	Jaw Width In.	Jaw Opening In.	Throat Depth In.	Wt. Each Lbs.
603M2	3	4	3	25
6031/2M	2 31/2	5	31/4	35
604M2	4	6	35/8	43
6041/2M	2 41/2	7	41/8	57
605M2	5	8	41/4	70
606M2	6	10	43/8	107
608M2	8	12	6	184
		One in a car	ton	

COLUMBIAN STATIONARY BASE MACHINISTS' VISES



Flat base makes it unnecessary to cut bench. Malleable iron castings, guaranteed unbreakable. Steel handle balls forged from handle stock. Self-lubricating graphite bronze bearing. Replaceable hardened tool steel "T" jaw faces, securely fastened with drive pins. No holes in gripping face. All sizes, except 6" and 8", have ground and polished anvil.

Vise No.	Jaw Width In.	Jaw Opening In.	Throat Depth In.	Wt. Each Lbs.
503M2	3	4	3	21
5031/2N	M2 3½	5	31/4	30
504M2	4	6	35/8	38
5041/21	$4\frac{1}{2}$	7	41/8	49
505M2	5	8	41/4	60
506M2	? 6	10	43/8	92
508M2	8	12	6	160
		One in a car	ton	

COLUMBIAN SWIVEL BASE KIT



Converts Columbian stationary base vise to swivel base type. Can be installed in 2 minutes. Includes swivel base, lock nut, lock bolt, center bolt, washer, bushing and plug cap.

Dusning	and plug cap.	
Kit No.	Fits Vise No.	Wt. Each Lbs.
563	503M2	4
5631/2	503½M2	5
564	504M2	5
5641/2	504½M2	8
565	505M2	10
566	506M2	15
568	508M2	24
	One in a carto	on


COLUMBIAN ADJUSTABLE JAW SWIVEL BASE VISES



Ideal for wide range of work. Indispensable in tool room or shop. With pin in place, swivel back jaw is locked rigidly for use as parallel jaw vise. Removal of pin permits adjustment of back jaw to firm grip on irregular or tapering pieces. Malleable iron unbreakable castings. Steel handle balls forged from handle stock. Self-lubricating graphite bronze bearings. Hardened tool steel replaceable jaw faces. Sizes larger than 5 inches have 2 swivel clamping nuts.

Vise No.	Jaw Width In.	Jaw Opening In.	Throat Depth In.	Wt. Each Lbs.
4031/2	31/2	5	31/4	36
4041/2	41/2	6	41/8	59
406	6	9	43/8	120
		One in a car	ton	


COLUMBIAN COMBINATION PIPE SWIVEL BASE VISES



Tool steel pipe jaws heat treated to insure hardness and strength. 3 jaws are interchangeable; each has 2 working faces. Special pipe jaw design makes possible holding pipe down to ½ inch. Pipe jaws do not protrude beyond jaw faces. Other work can be held without removing pipe jaws. Malleable iron unbreakable castings. Steel handle balls forged from handle stock. Self-lubricating graphite bronze bearing.

Vise No.	Jaw Width In.	Jaw Opening In.	Throat Depth In.	Pipe Capacity In.	Wt. Each Lbs.
2031/	31/2	4	4	1/8 - 21/2	38
2041/	2 4 1/2	5	53/8	$\frac{1}{8} - 3\frac{1}{2}$	61
205	5	6	61/4	1/8 - 41/2	95
206	6	10	71/8	1/8 - 6	162
		One	in a carton		

COLUMBIAN SHEET METAL WORKERS' VISE




Specially designed for sheet metal work, wood working and body work. High tapering jaws with extra deep smooth faces. Malleable iron unbreakable castings. Replaceable steel jaw faces.

Vise No.	Jaw Width In.	Jaw Opening In.	Throat Depth In.	Wt. Each Lbs.
2241/2	41/2	9	57/8	63
		One in a car	rton	

The COLUMBIAN line is complete . . . choose from these fine VISES!

SMOOTH JAW FACES FOR COLUMBIAN MACHINISTS' VISES



Smooth jaw faces of hardened tool steel can be fitted to any Columbian Machinists' Vise where standard knurled faces would mar aluminum, other soft metals or polished surfaces. T-Section design provides solid gripping surface covering entire jaw face area.

Smooth jaw faces are furnished at no additional charge on original vise orders.

SPECIAL JAW FACES

Jaw face blanks of mild T-Section tool steel with machined tongue, drilled holes and dowel pins can be furnished for making special jaw faces to hold irregular shaped production work. Hardening instructions provided.

See typical examples below.



COLUMBIAN COPPER JAW CAPS



Fit snugly over jaws and cover knurled steel faces to prevent marring of soft materials. Easily installed and removed.

Jaw Width, In. 3 $3\frac{1}{2}$ 4 $4\frac{1}{2}$ 5 6

COLUMBIAN DRILL PRESS AND MILLING MACHINE VISES



Eliminate need for special and expensive jigs and fixtures. Provide maximum clamping and holding power. Choice of plain or steel jaw faces. Acme-threaded, cold-rolled steel screw. Swivel crank handle drops out of way. 4 keyslots provide precision mounting. All parts replaceable and interchangeable.

Vise No.	Jaw Width In.	Jaw Depth In.	Jaw Opening In.	Jaw Style	Screw Diam. In.	Wt. Each Lb.
1513½ 1523½ 1515 1525	3 ½ 3 ½ 5	1 7/8 1 7/8 2	4½ 3¾ 6½ 6	Plain Steel Plain Steel	3/4 3/4 7/8 7/8	17½ 19 29½ 32

One in a carton


COLUMBIAN HINGED PIPE VISES



Hold pipe, conduit and thin wall tubing firmly without bending. Long-bearing heat-treated tool steel jaws prevent crushing and scoring. Lower pipe jaws, milled on both sides for double life, are securely fastened from top and reversed without removing vise from bench. Handy bender for small pipe, conduit tubing.

Vise No.	Pipe Capacity In.	Wt. Each Lbs.
160	1/8 - 2	8
161	1/8 - 21/2	11
162	1/8 - 31/2	17
163	1/8 - 41/2	26
	One in a carton	

COLUMBIAN HINGED PIPE VISES



Replaceable tool steel pipe jaws, accurately milled and heattreated for positive gripping and maximum life. Heavy-duty sizes have extra strength required for holding large-diameter work.

Vise No.	Pipe Capacity In.	Wt. Each Lbs.
16X	1/8 - 11/2	5
Heavy Duty		
164X	1/8 - 6	37
165X	1 - 8	81
166X	11/2 - 12	163
	One in a carton	


COLUMBIAN "KROMIRON" BENCH ANVIL



Made of shock-resisting "Kromiron" castings. Broad, tough face. Equipped with steel cut-off tool. Ideal for many jobs.

Anvil No.	Face In.	Horn In.	Base In.	Wt. Each Lbs.
9A	3 x 6	3	4 x 5½	9
	Individua	Leartons 6 c	artons in a case.	

COLUMBIAN WORKSHOP VISES




Heavy-duty channel steel front jaw beam covers screw. Extra large back jaw anvil and anvil horn. Cold-rolled steel screw. Handle balls forged from handle stock. Replaceable malleable iron nut, Acme thread. Replaceable heat-treated steel jaw faces. Permanent pipe jaws, positive "Tri-Grip" design. Positive locking swivel base, slip-handle lock nut. Polished jaws and anvil, bright red finish.

Vise No.	Jaw Width In.	Jaw Opening In.	Pipe Capacity In.	Wt. Each Lbs.
D43½ D44	31/2	4	1/8 - 11/4	16
D45	5	6	$\frac{1}{8} - 2$ $\frac{1}{8} - 2\frac{1}{2}$	27 38

Individual cartons. D43½ packed 5 in case. D44 packed 1 in case. D45 packed 1 in case.


COLUMBIAN HOMESHOP VISES



Extra heavy steel beam. "Balanced" castings for super strength. Extra large back jaw anvil and anvil horn. Cold-rolled steel screw. Slip-proof screw collar. Handle balls forged from handle stock. 3-point "Tri-Grip" permanent pipe jaws. Positive locking swivel base, with slip-handle lock nut. Polished jaws and anvil, bright red finish.

Vise No.	Jaw Style	Jaw Width In.	Jaw Opening In.	Pipe Capacity	Wt. Each Lbs.
D331/2	Steel	31/2	4	1/8-11/4	13
D631/2	Plain	31/2	4	1/8-11/4	13
	Individ	dual cartons	5. 5 cartons i	n a case.	

COLUMBIAN HOMESHOP VISES



Outstanding values. Sturdy, reliable, inexpensive. Replaceable faces. Handle balls forged from handle stock. Cold forged steel screw. Positive locking swivel base. Large anvil and horn. Polished jaws. Screw, handle, lock nut bright zinc plate. Permanently cast double pipe grips in front jaw, single in back.


Vise No.	Jaw Width In.	Jaw Depth In.	Jaw Opening In.	Pipe Capacity In.	Wt. Each Lbs.
031/2	31/2	21/8	3	1/8-1	10
04	4	21/4	4	$\frac{1}{8} - 1$ $\frac{1}{8} - 1\frac{1}{4}$	13
Individu	al cartons	. 031/2 pack	ed 10 in cas	se. 04 packed	5 in case.



For every home or shop job. Stands upright or lays flat on either side. Rotates around base. Locks automatically in any position. Ideal for carpentry, sanding, sawing, tool sharpening, carving. Smooth, positive-grip, mar-free jaw faces.

				•		
Vise	Jaw Width	Jaw Depth	Jaw Opening	Pipe Capacity	Height	Wt. Each
No.	In.	In.	In.	In.	In.	Lbs.
731/2	31/2	21/2	5	1/8-11/2	81/2	161/2
		Inc	lividual car	tone		

GYRO-VISE ATTACHMENTS



- Standard Base around which Gyro-Vise rotates. Additional bases can be placed in different locations and vise moved from job to job. Weight, 1% lbs.
- Angle Adapter permits operation of Gyro-Vise in a vertical arc. Weight, 2¼ lbs.
- **3.** Flush Base for applications where it is desirable to keep working surface free of obstacles. Wt., 434 lbs.
- 4. Replaceable pipe jaws. Weight (set of 2), 1 lb.



COLUMBIAN CLAMP VISE

Ideal for home shop or serviceman. Fits bench, table or block up to $2\frac{1}{4}$ inches thick. Unbreakable $\frac{3}{8}$ inch steel clamping stud. Power-grip cantilever foot. Fully-machined jaws. Smooth faces. V groove jaws for holding rounds. Accurately-threaded steel screw located below guide rods so work resting on rods cannot touch screw. Handy anvil. Gray and bright-plated finish.

Vise	Jaw Width	Jaw Depth	Jaw Opening	Wt. Each
No.	In.	In.	In.	Lbs.
23	3	11/2	23/8	31/4
	Individual ca	ertons 10 car	tons to a case.	




COLUMBIAN CARPENTER'S VISE

Clamps on anything, including $2\frac{1}{4}$ inch bench. Cast aluminum alloy jaws open $3\frac{1}{2}$ inches to hold 2×4 . Tool steel feed screws and guide pin. Easily carried in carpenter's kit. Smooth jaw faces. Drilled for wood faces.

Vise No.	Jaw Size In.	Jaw Opening In.	Wt. Each Lbs.
1655	5 x 5	31/2	23/4
	One in a bo	x. 6 to a carton.	

COLUMBIAN Woodworkers' VISES

modern vises for all of today's needs

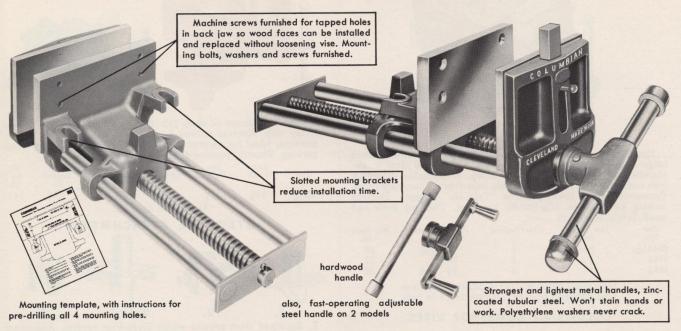

Choice of 2 Continuous Screw Mechanisms . . .

RAPID ACTING


... for fast and frequent changes in jaw opening




"Power-Slide" mechanism incorporates a gravity friction clutch. Counter-clockwise operation disengages nut. Clockwise operation engages 180° half nut, producing continuous inward jaw movement and high pressure holding without slippage.

SOLID NUT


... for maximum strength and longest life



Teaching Aids Help Schools Use Vises More Efficiently



Graphite bronze thrust bearing constantly lubricates screw head without oil or grease.



SCHOOL CATALOG 8 pages . . . illustrations of vises at work . . . vise specifications




USE AND CARE CHARTS $8\frac{1}{2} \times 11$ inches for notebook use . . . 16×22 inch bulletin board posters

SCHOOL SHOP SPECIFICATIONS There are amounts beare fainty insures mercurial to the officers operation and least account of the control of th

SPECIFICATIONS
List basic design features
essential to efficient vise
operation, long service life

COLUMBIAN RAPID ACTING CONTINUOUS SCREW WOODWORKERS' VISES



For use where changes in jaw openings must be made frequently and fast. Clockwise operation engages "Power-Slide" mechanism with continuous thread screw for unrestricted inward motion and holding power. Counter-clockwise operation disengages mechanism for "fast sliding" adjustment of jaw opening. Vises furnished with dog type front jaw for use with bench stops.


Vise No.	Jaw Size In.	Jaw Opening In.	Handle Type	Wt. Each Lbs.
7RDW	4 x 7	9	Wood	27
7RDT	4 x 7	9	Steel	28
10RDW	4 x 10	12	Wood	33
10RDT	4 x 10	12	Steel	34
	(One in a carton		

COLUMBIAN SOLID NUT CONTINUOUS SCREW WOODWORKERS' VISES

For general industrial and school woodworking. Heavy steel screw with double lead, fast running thread provides maximum operating speed. Solid nut assures long, repair-free life. Vises furnished with dog type front jaw for use with bench stops.

Vise	Jaw Size	Jaw Opening	Handle	Wt. Each
No.	In.	In.	Type	Lbs.
7CDW	4 x 7	9	Wood	27
7CDT	4 x 7	9	Steel	28
10CDW	4 x 10	12	Wood	33
10CDT	4 x 10	12	Steel	34
	(ne in a carton		

COLUMBIAN "WIDE-SIDE" VISES




Conventional 7" Vise Columbian 7" "Wide-Side" 7 inch Woodworkers' Vises with $2\frac{1}{2}$ inch clamping area on the left side where it is needed most. Clamping area is $2\frac{1}{2}$ times that of conventional 7 inch Woodworkers' Vises. Dog type front

jaw for use with bench stops.

Vise No.	Jaw Size In.	Jaw Opening In.	Nut Type	Handle Type	Wt. Each Lbs.
V-7RDW	4 x 7	9	Rapid Act.	Wood	29
V-7RDT	4 x 7	9	Rapid Act.	Steel	30
V-7CDW	4 x 7	9	Solid	Wood	29
V-7CDT	4 x 7	9	Solid	Steel	30
		One in a	carton		


COLUMBIAN SOLID NUT CONTINUOUS SCREW WOODWORKERS' VISES WITH ADJUSTABLE STEEL HANDLES



Adjustable steel handle greatly increases operating speed. Handle is held in desired position by tension spring in head. With handle centered, speed comparable to a rapid-acting vise is possible. Extension of handle gives leverage to tighten vise. Dog type front jaw.

Vise No.	Jaw Size In.	Jaw Opening In.	Jaw Style	Wt. Each Lbs.
7CDS	4 x 7	9	Dog	27
10CDS	4 x 10	12	Dog	33
	- (Ine in a corton		

COLUMBIAN WOODCRAFT VISE



Dog in front jaw. Strong cast iron jaws. Cold-rolled steel screw, screw head and malleable iron nut. Zinc-plated steel handles with balls forged from handle stock. Holes for wood faces. Fits bench up to 2½ inches.

Vise	Jaw Size	Jaw Opening	Wt. Each
No.	In.	In.	Lbs.
6CD	3 x 6	7	10

One in a carton


COLUMBIAN WOODCRAFT VISE



Perfect for homeshop. Fabricated steel jaws. Plated cold-rolled steel screw and screw head. Malleable iron nut. Chrome-plated steel handles with balls forged from handle stock. Holes for wood faces. Fits bench up to 21/4 inches.

Vise	Jaw Size	Jaw Opening	Wt. Each
No.	In.	In.	Lbs.
6C	3 x 6	7	10

One in a carton



Special double lead thread provides maximum speed and positive gripping. Screw head thrust washer and nut casting are extra heavy. Hardwood handle.

Diameter In.	Length In.	Wt. Per Doz., Lbs
1	16	65
11/8	16	80
11/4	17	90

COUMBIAN LEVELS

set new standards of quality and accuracy!



17 ALUMINUM LEVELS . . . 18-24-28-30-48" lengths.



7 MAGNESIUM LEVELS . . . 24-28-30-48-72-78-96" lengths.



11 WOOD LEVELS . . . 18-24-28-48" lengths.








Also-4 torpedo levels . . . 2 line and surface levels . . . 1 pocket level

PLUS 6 NEW EXTRUDED ALUMINUM LEVELS
WITH SHOCK-PROOF IMPLEX® VIAL HOLDERS

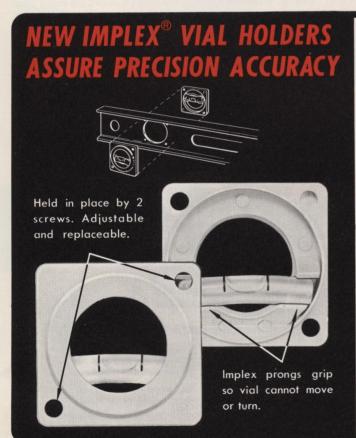

COLUMBIAN "SERIES A" ALUMINUM LEVELS



No. A2418 and No. A2424



No. A3424



No. A3624 . . . No. A3628 . . . No. A3648

Made of extruded, anodized aluminum I-beams. Implex shock-proof, adjustable, replaceable vial holders hold vials securely without use of glues, binders, putty. Ideal for outdoor and low temperature use. Plexiglas snap-in protective windows. 100% accurate. Will stand hard service, even abuse. Top value at economy price. For extra vial units, specify No. A-1.

Level No.	Size In.	No. Plumbs	No. Levels	Wt. Each Lbs.
A2418	3/4 x 21/8 x 18	2	2	3/4
A2424	3/4 x 21/8 x 24	2	2	1
A3424	$\frac{3}{4} \times \frac{2}{8} \times 24$	2	2	1
A3624	3/4 x 21/8 x 24	4	2	1
A3628	3/4 x 21/8 x 28	4	2	11/4
A3648	3/4 x 21/8 x 48	4	2	2
	One in certified s	shipping car	rton.	

43 different sizes and types to match any requirement

COLUMBIAN PROCRAFT ALUMINUM LEVELS



No. 518



No. 518A ... No. 524A



No. 524 . . . No. 528 . . . No. 530 . . . No. 548

Special aluminum alloy castings assure maximum accuracy, strength and handling ease. Machined on all sides. Edges filed smooth. Vials give accurate reading from either edge. Metallic-sealed vials solid set in special cement. No need for adjusting. Vials protected on both sides by extra heavy glass lenses.

Level No.	Size In:	No. Plumbs	No. Levels	No. 45° Vials	Wt. Each Lbs.
518	1 x 21/4 x 18	2	2	0	11/2
518A	1 x 2½ x 18	1	2	1	11/2
524A	1 x 21/4 x 24	1	2	1	2
524	1 x 2 1/4 x 24	4	2	0	2
528	1 x 21/4 x 28	4	2	0	21/2
530	1 x 2½ x 30	4	2	0	25/8
548	1 x 2 1/4 x 48	4	2	0	31/2

One in Certified "Levelpack" Shipping Carton

COLUMBIAN "CHALLENGE" ALUMINUM LEVELS



No. 4518 and No. 4524



No. 6524 and No. 6528

Outstanding value. Top quality, full size, die cast frames. Attractive blue. Bright machined edges. Ruled top edge. Readings from either edge. Solid-set catseye metallic-sealed vials protected on both sides by heavy glass lenses.

Level No.	Size In.	No. Plumbs	No. Levels	Wt. Each Lbs.
4518	1 x 2½ x 18	2	2	1
4524	1 x 2½ x 24	2	2	11/2
6524	$1 \times 2\frac{1}{8} \times 24$	4	2	11/2
6528	1 x 2½ x 28	4	2	134

One in Certified "Levelpack" Shipping Carton



When the bubble's in the bullseye, it's level. Levels in all directions. Thousands of home and industrial uses. 134 in. diameter. Accurate, shock-proof, weather-proof, scratch-proof. Molded of crystal clear Plexiglas Acrylic Plastic. Virtually unbreakable. Pre-drilled for mounting on any flat surface.

Level	Level	Wt. Each
No.	Diameter	Oz.
777	13/4"	3/4
	One on display card. 10 cards to	box.

COLUMBIAN MAGNESIUM LEVELS



Made of extruded magnesium I-beams. Extremely lightweight, $\frac{1}{3}$ lighter than aluminum. Easier to carry and use. Virtually unbreakable. Will last a lifetime. Unaffected by heat, cold, moisture. Edges and sides absolutely smooth, parallel, 100% true. 24-28-30-48 in. levels have 6 vials. 72-78-96 in levels have 10 vials.



A single 2-piece vial assembly attaches to each side of level. In case of accident, user can adjust or replace single vial quickly, without removing other. Because of exclusive Columbian design, screws can be tightened without disturbing adjustment. In ordering, specify Vial Assembly No. 701A.

Level No.	Size In.	No. Plumbs	No. Levels	Wt. Each Lbs.
724	$1\frac{1}{8} \times 2\frac{5}{8} \times 24$	4	2	13/4
728	$1\frac{1}{8} \times 2\frac{5}{8} \times 28$	4	2	2
730	$1\frac{1}{8} \times 2\frac{5}{8} \times 30$	4	2	21/4
748	$1\frac{1}{8} \times 2\frac{5}{8} \times 48$	4	2	31/4
772	$1\frac{1}{8} \times 2\frac{5}{8} \times 72$	6	4	5
778	$1\frac{1}{8} \times 2\frac{5}{8} \times 78$	6	4	51/4
796	$1\frac{1}{8} \times 2\frac{5}{8} \times 96$	6	4	61/2

One in Certified "Levelpack" Shipping Carton

COLUMBIAN ALUMINUM POCKET LEVEL



For use on lines, shafting, pipe. Also for leveling stoves, refrigerators, pictures, TV, appliances. $\frac{3}{8}$ inch hard drawn hex colored aluminum tubing, $5\frac{1}{4}$ in. long. Pencil clip. Display box contains 4 each of red, blue, gold.

Level No.	Length In.	Wt. Per Doz., Lbs.
556	51/4	3/4
	12 in a carton	

COLUMBIAN ALUMINUM TORPEDO LEVEL



Die cast. Unusually accurate and shock resistant. 1 plumb, 1 level, 1-45° vial. Bottom of aluminum body precision-grooved for aligning on pipe or shafting. 9 in. long 1½ in. high, only ½ in. wide at widest point. Perfect for carrying in pocket. Individually packaged in clear plastic sleeves for pegboard display.

Level No.	Size In.	No. Plumbs	No. 45° Vials	No. Levels	Wt. Per 10, Lbs.
339	5/8 x 11/8 x 9	1	1	1	3
		10 in a ca	rton		

COLUMBIAN "COMPACT" ALUMINUM TORPEDO LEVEL



Lightweight. Hand-fitting. Die cast. Attractive blue frame. Ideal for plumbers, mechanics, electricians, home craftsmen. Precision grooved base for aligning on pipe or shafting. Packaged in clear plastic pouch for pegboard display.

Level No.	Size In.	No. Plumbs	No. 45° Vials	No. Levels	Wt. Per 10, Lbs.
39	5/8 x 11/8 x 9	1	1	1	3
		10 in a ca	rton		

COLUMBIAN CARPENTERS' WOOD LEVELS

SUGAR PINE . . . 4 VIALS



Easy-to-read metallic-sealed vials are protected with heavy glass lenses. Sugar pine is top quality California kiln-dried, finished in clear varnish.

Level No.		Size In.	No. Plumbs	No. Levels	Wt. Each Lbs.
424	-plain	11/8 x 23/8 x 24	2	2	11/4
428	-plain	11/8 x 23/8 x 28	2	2	11/2
	One in Cer	tified "Levelpack	" Shippin	ng Carto	n

COLUMBIAN GENERAL PURPOSE TOP READING LEVELS



One metallic-sealed plumb. One level with aluminum plate. Made of kiln-dried pine. Convenient finger grips and hang hole. For general utility, home workshop and daily job use. Economically priced, they offer the utmost in level value and dependability.

Level	Size	No.	No.	Wt. Each
No.	In.	Plumbs	Levels	Lbs.
2018	11/8 x 23/8 x 18	1	. 1	3/4
2024	11/8 x 23/8 x 24	1	1	1
	6 in a	acarton		

COLUMBIAN ALUMINUM LINE AND SURFACE LEVEL



Made of hand drawn % in. hex tubing, 3 in. long. Exceptionally light. For determining foundation grades, laying pipe, brick, hedge trimming. Used by field engineers, masons, cement workers, carpenters, mechanics. One piece nickel silver hooks and end caps riveted to body for maximum strength, accuracy and durability. Hook design prevents level from falling off line. Each level mounted on blue and yellow pegboard display card.

Level	Length	Wt. Per
No.	In.	10, Lbs.
555	3	1/2
	10 in a carton	

COLUMBIAN ALUMINUM LINE AND SURFACE LEVEL



Economy leader. Levels from hooks or base. Made of $\frac{3}{8}$ in. hex tubing, 3 in. long. Hooks embedded in plaster and precision formed to prevent falling off line. For determining foundation grades, laying pipe, brick, hedge trimming. Used by field engineers, masons, cement workers, carpenters, mechanics. Each level mounted on red and yellow pegboard display card.

Level No.	Length In.	Wt. Per 10, Lbs.
666	3	1/2
	10 in a carton	

COLUMBIAN MASONS' WOOD LEVELS



6 vials . . . round lens . . . open grip Plain—S48 Brass End—S48BE Brass Bound—M48BB



6 vials . . . round lens . . . closed grip Brass Bound — 1648BB



6 vials . . . oval lens . . . open grip Plain—2648 Brass End—2648BE Brass Bound—5648BB

Easy-to-read metallic-sealed vials are protected with heavy glass lenses. Sugar pine is top quality California kiln-dried, finished in clear varnish. Mahogany is genuine top stock, carefully selected and kiln-dried. Brass bound levels have precision-rolled, double-angle, channel grip, screwless binding that cannot come loose, assures maximum accuracy and long life. All levels are $1\frac{1}{8}$ x $2\frac{9}{8}$ x 48 in.

Level	Wood	No.		Wt. Each
No.	Stock	Plumbs	Levels	Lbs.
S48 -plain	sugar pine	4	2	3
S48BE -brass end	sugar pine	4	2	31/4
M48BB-brass bound	mahogany	4	2	41/2
1648BB-brass bound	mahogany	4	2	41/2
2648 -plain	sugar pine	4	2	3
2648BE-brass end	sugar pine	4	2	31/4
5648BB-brass bound	mahogany	4	2	41/4
One in Certified	"Levelpack"	Shipping	Carton.	

COLUMBIAN HARDWOOD TORPEDO LEVELS



No. 209



No. 309

Accurate, handy size, 9 in. long levels for industrial and home workshop use. Tapered, streamline shape, pocket size. Aluminum top plate.

Level No.	Size In.	No. Plumbs	No. 45° Vials	No. Levels	Wt. Per Doz., Lbs.
209 309	34 x 114 x 9 34 x 114 x 9	1	1	1 1	$\frac{2\frac{1}{4}}{2\frac{1}{2}}$
		12 in a c	arton		

See your COLUMBIAN distributor


PARTS ORDER INSTRUCTION

When ordering repair parts, always list the following information:

- 1. Vise Model No.
- 2. Part Name
- Jaw width and type of jaw faces. For example, "T" section, channel or flat bar.


Constant improvements in Columbian Vises have naturally resulted in specification changes, over the years, without corresponding changes in catalog numbers. The above information will enable us to furnish correct parts for all vises, regardless of age.

PART LIST FOR COLUMBIAN MACHINISTS', HEAVY CHIPPING, AND BODYMAKERS' VISES

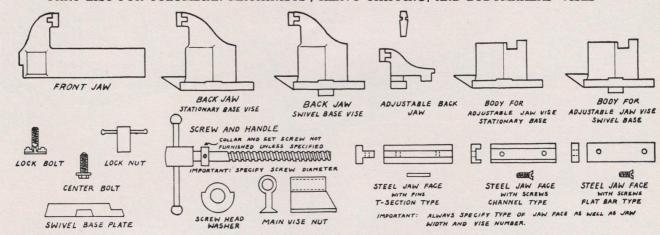


Width of Vise Jaw	Steel Jaw Face (Pair)	Screw and Handle	Collar and Set Screw	Screw Head Washer	Main Vise Nut	Swivel Base Plate	Center Bolt for Swivel Base	Lock Bolt for Swivel Base	Lock Nut for Swivel Base	Front Jaw	Back Jaw	for Adjust. Jaw Vise	Swivel Back Jaw	Taper Pin for Swivel Back Jaw
3 3½ 4 4½ 5 6 8	7.20 7.50 8.40 9.00 10.00 12.60 16.00	6.00 7.20 9.00 12.00 15.00 24.00 36.00	1.00 1.10 1.20 1.20 1.50 1.80 2.40	.60 .70 .90 .90 1.20 1.50 1.80	2.00 2.40 3.00 3.00 4.50 6.00 10.50	8.00 10.00 12.00 14.00 22.00 28.00 60.00	1.50 1.80 2.10 2.40 2.70 3.60 5.25	2.00 2.00 2.00 2.00 3.60 3.60 3.60	1.80 1.80 1.80 1.80 3.00 3.00 3.00	15.00 17.00 20.00 24.00 30.00 60.00 110.00	15.00 17.00 20.00 24.00 30.00 60.00 110.00	18.00 22.00 27.00 65.00	15.00 17.00 20.00 - 30.00	1.20 1.20 1.20 2.40

PART LIST FOR COLUMBIAN COMBINATION PIPE VISES

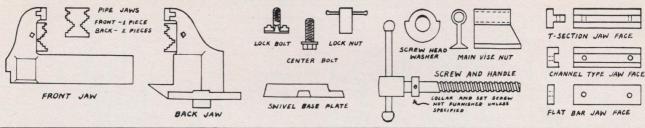

Vise No.	Steel Jaw Face (Pair)	Pipe Jaws Set (3)	Pipe Jaws (Single)	Screw and Handle	Collar and Set Screw	Screw Head Washer	Main Vise Nut	Swivel Base Plate	Center Bolt and Washer	Swivel Lock Nut	Swivel Lock Bolt	Front Jaw	Back Jaw
203 ½	7.20	8.00	2.67	9.00	1.20	.90	3.00	10.00	1.80	1.80	2.00	20.00	20.00
204 ½	9.00	10.80	3.60	15.00	1.50	1.20	4.50	14.00	2.40	1.80	2.00	26.00	26.00
205	10.00	18.00	6.0 0	20.00	1.80	1.50	6.00	22.00	2.70	3.00	3.60	45.00	45.00
206	12.60	18.00	6.00	30.00	2.10	1.80	8.30	28.00	3.60	3.00	3.60	78.00	78.00

PART LIST FOR COLUMBIAN HINGED PIPE VISES



Vise No.	Pipe Jaws Com- plete Set(3)	Single Pipe Jaws Each	Slide or Jaw Clamp	Screw and Handle	Base	Frame	Hook or Latch
16X 160	3.90 4.50	1.30	.60	2.60	3.60	2.30	.60
161	5.40	1.80	.80	3.10	4.10	2.60	.80
162	6.60	2.20	1.20	5.60	7.20	4.60	1.30
163	9.30	3.10	1.70	7.70	10.80	6.80	
164X	15.30	5.10	3.10	16.90	23.10	14.70	1.90
							4.10
165X	19.75	6.55	6.40	29.40	41.00	26.05	7.55
166X	30.70	10.25	9.60	44.55	60.55	38.85	11.40
Walter Street							1 - 15 - 17


See your COLUMBIAN distributor

PARTS LIST


MAPLE FACES

In Columbian Woodworkers' Vises back jaws are drilled and tapped so wood faces may be attached with flat head machine screws, without remounting vise. Maple faces protect the vise, prevent damage to edge tools from striking the metal faces. Add \$3 to the list price of vises to be equipped with wood faces.

PART LIST FOR COLUMBIAN WOODWORKERS' VISES

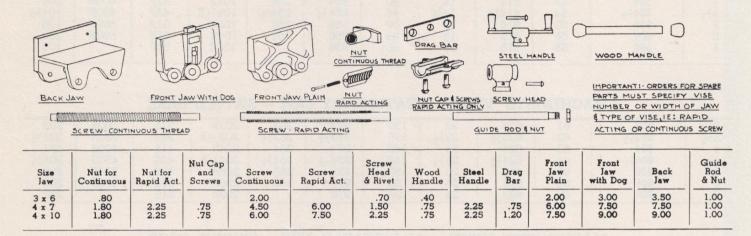

PART LIST FOR COLUMBIAN HOMESHOP VISES



Vise No.	Steel Jaw Face (Pair)	Pipe Jaws per Pair	Screw and Handle	Swivel Base Plate	Front Jaw	Back Jaw	Main Vise Nut	Lock Nut and Bolt
D-43 ½	2.00	.75(c)	1.80	1.15	3.00	3.40	1.30	.45
D-44	2.40	1.15(c)	2.25	2.25	5.25	6.00	1.60	.50
D-45	3.50	_	3.00	3.00	6.00	7.50	2.00	.55
D-33 1/9	2.00	_	1.50	1.15	2.50	3.00	_	.45
D-53 1/2	_	_	1.25	_	2.00	2.00	_	_
D-63 1/2		_	1.50	1.15	1.80	2.25		.45

QUICK REFERENCE VISE CHART

WOODWORKERS' VISES

COLUM	BIAN	Abernathy	American	Morgan	Parker	Prentiss	Richard Wilcox	Simplex	Wilton	Yost
7RPW 7RPT	1R	70		100			430-1	W-7-P	73W 73	
7RDW 7RDT	1RD	70D	204	100A-18A	445W	335W	430S-1	W-7	63W 63	405
10RPW 10RPT	9R	80		200	21		430-2	W-10-P	74W 74	••••
10RDW 10RDT	9RD	80D	203	200A	446W	336W	430S-2	W-10	64W 64	400
7CPW 7CPT	5C	S70 		ae			630-1	W-7-C	71W 71	
7CDW 7CDT	5CD	S70D	204C	10A	25W	15W	630S-1	W-7-CD	61W 61	
10CPW 10CPT	3C	S80 		20			630-2	W-10-C	72W 72	
10CDW 10CDT	3CD	S80D	203C	20A	26W	16W	630S-2	W-10-CD	62W 62	
7CDS	5CDS			210A	25S	15S	188	W-7-CDS		
10CDS	3CDS			220A	26S	16S		W-10-CDS		

QUICK REFERENCE VISE CHART

COLUMBIAN Vise catalog numbers and the catalog numbers of similar sizes and types of other manufacturers.

Jaw widths are in inches and the closest corresponding size has been used in each case.

MACHINISTS' VISES — STATIONARY JAW — STATIONARY BASE

Jaw Width	COLUMBIAN	American	Athol	Hollands	Morgan	Parker	Prentiss	Reed	Simplex	Wilton	Yost
3 3½ 4 4½ 5 6 8	503 503½ 504 504 504½ 505 506 508	51 52 53 54 55 56 58	613 613½ 614 614½ 615 616 618	13 13½ 14 14½ 15 16 18	30 35 40 45 50 60 80	953 953½ 954 954½ 955 956 958	253 253½ 254 254½ 255 256	103R 103½R 104R 104½R 105R 106R 108R	31P 33P 41P 43P 51P 61P 81P	300N 350N 400N 450N 500N 600N	103 103½ 104 104½ 105 106 108

MACHINISTS' VISES — STATIONARY JAW — SWIVEL BASE

3	603	61	623	23	130	973	263	203R	315	300S	203
31/2	6031/2	62	6231/2	231/2	135	9731/2	2631/2	203½R	335	350S	2031/2
4	604	63	624	24	140	974	264	204R	415	400S	204
41/2	6041/2	64	6241/2	241/2	145	9741/2	2641/2	204½R	435	450S	2041/2
5	605	65	625	25	150	975	265	205R	515	500S	205
6	606	66	626	26	160	976	266	206R	61S	600S	206
8	608	68	628	28	180	978		208R	818	1	208

MACHINISTS' VISES — ADJUSTABLE JAW — SWIVEL BASE

3½	4031/2	75	6431/2	431/2	335	3831/2	4531/2	403½R	33SJ	350SJ	431/2
41/2	4041/2	77	6441/2	441/2	345	3841/2	4541/2	404½R	41SJ	450SJ	
6	406	79	646	46	360	386	456	406R	43SJ	600SJ	78

COMBINATION PIPE VISES

31/2	2031/2	22	323½X		87	4331/2	3531/2	1C	CP33	C-0	31C
41/2	2041/2	23	324½X	531/2	88	4341/2	3541/2	2C	CP43	C-1	32C
5	205	24	325X	54	2881/2	435	355	3C		C-2	33C
6	206	25	326X	56	2891/2	436	356	4C	CP61	C-3	34C

SHEET METAL WORKERS' VISE

			Mark Street Street						
41/2	2241/2	206	4241/2	2641/2	138	6741/2	 224½R	42CPS	 503


HINGED PIPE VISES

			Standard Vis	es		He	eavy Duty Vi	ises
Capacity*	1/8-1-1/2	1/8-2	1/8-2-1/2	1/8-3-1/2	1/8-4-1/2	1/8-6	1-8	1-1/2-12
COLUMBIAN	16X	160	161	162	163	164X	165X	166X
American		2	3	4	5			
Armstrong	145.51.0	70	71	72	73	74	75	
Athol		212	2121/2	2131/2	2141/2	216	218	
Capewell	231	232	233	234	135	136		
Erie		OH	1H	2H	ЗН	4H	5H	6H
Hollands		01	02	03	04	64	65	66
Morgan		2M	4M	6M	8M			
Nye	NOO	NO	N1	N2	N3			
Parker	The state of the s	180	181	182	183			
Prentiss		190	191	192	193			
Reed	00	0	1	2	3	64	65	66
Rigid		21	22	24	26	27		
Simplex	00019	12	121/2	131/2	141/2	30.50	W.96	
Toledo			22		25			
Wilton	3.53	52	53	54	55			
Yost			51	52	53	64	65	66

^{*}Variations listed under nearest standard specification.



for best advice about VISES and LEVELS ... see your COLUMBIAN distributor

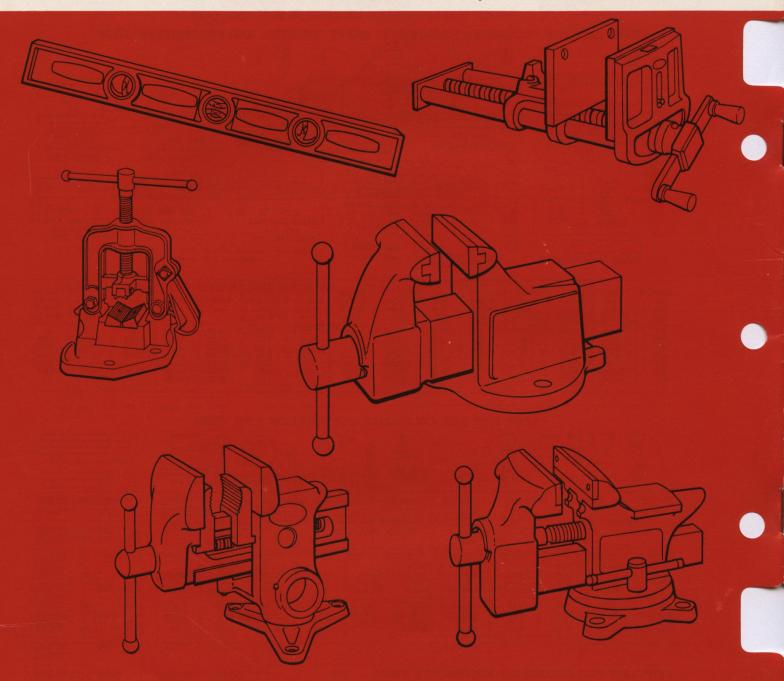

THE COLUMBIAN VISE & MFG. CO.

9021 Bessemer Ave. Cleveland, Ohio 44104

Telephone: 341-2134

Copyright, 1965 . . . The Columbian Vise & Mfg. Co. 3942-L Litho in U.S.A.